


The KT66


Specification and max ratings(*)

Filament Voltage	6.3 V
Filament Current	1.3 A
Plate Voltage (<i>max</i>)	550 V
Plate Current (<i>max</i>)	200 mA
Plate Dissipation (<i>max</i>)	25 W
Screen Voltage (<i>max</i>)	550 V
Screen Current (<i>max</i>)	--- mA
Screen Dissipation (<i>max</i>)	3.5 W

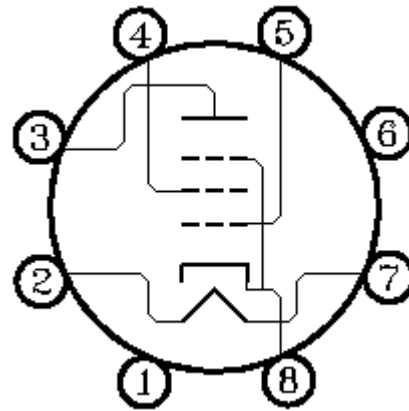


(*) These specifications are provided 'as-is', with no warranty of any kind. Use of these parameters shall be entirely at the user's own risk.

KT66 triode mode connection.

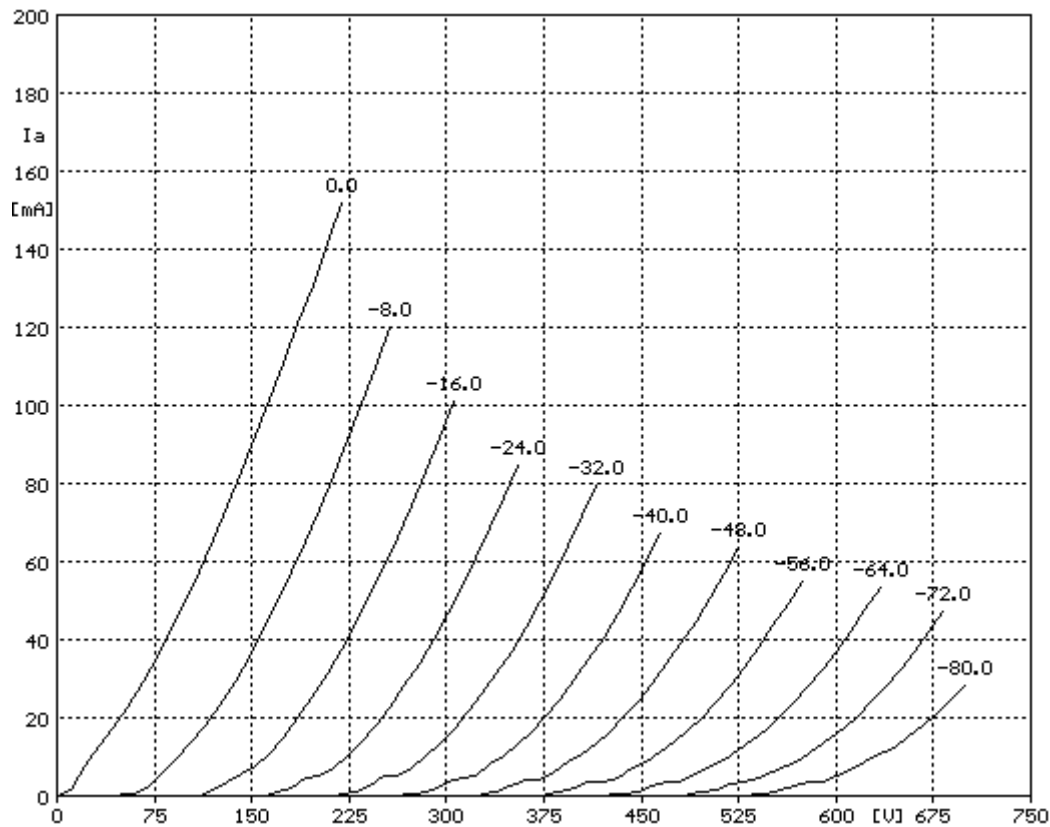

KT66 ultralinear mode connection.

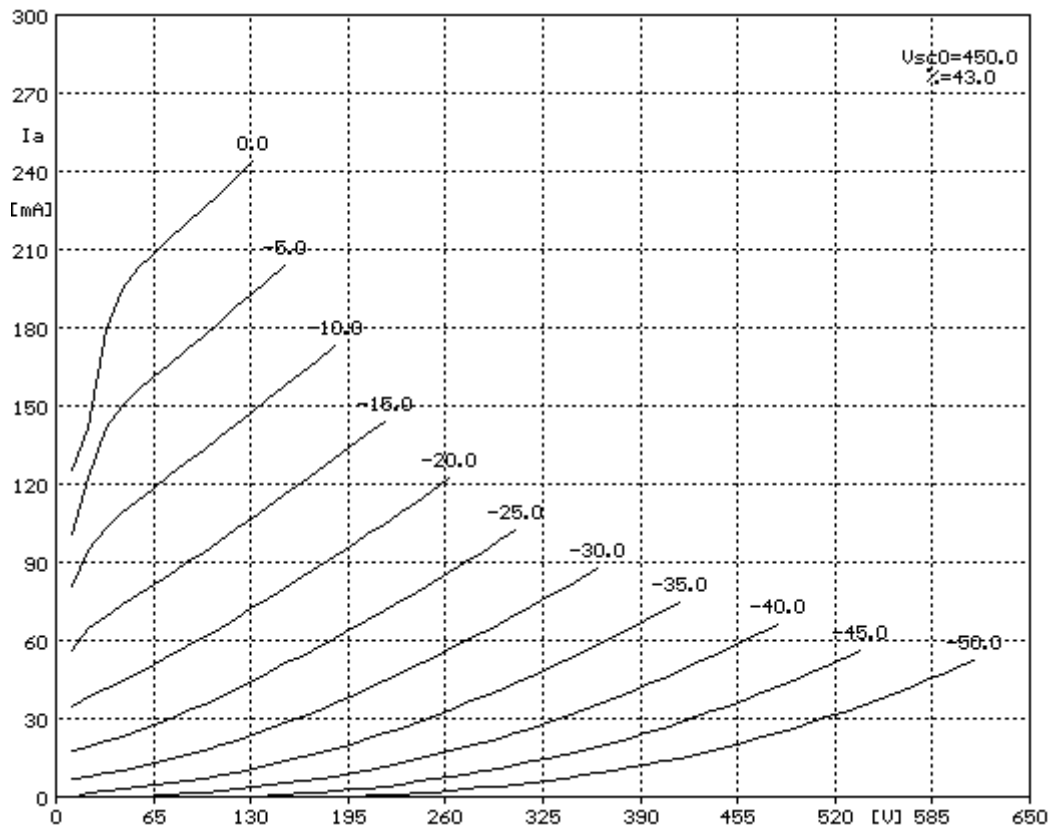

KT66 penthode mode connection.

